


INSTRUCTION MANUAL



SP10, SP10R, SP20, and SP20R Solar Panels

Revision: 4/11

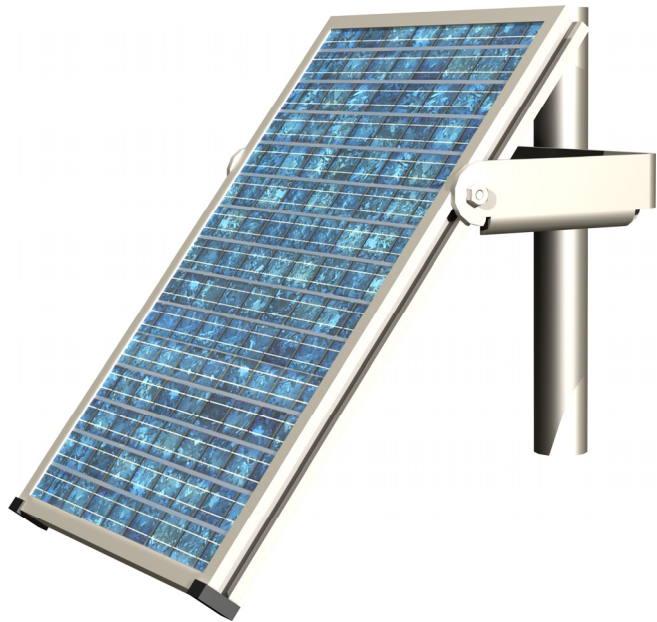

Copyright © 1987-2011
Campbell Scientific, Inc.

Warranty and Assistance

PRODUCTS MANUFACTURED BY CAMPBELL SCIENTIFIC, INC. are warranted by Campbell Scientific, Inc. ("Campbell") to be free from defects in materials and workmanship under normal use and service for twelve (12) months from date of shipment unless otherwise specified on the corresponding Campbell invoice. Batteries, fine-wire thermocouples, desiccant, and other consumables have no warranty. Campbell's obligation under this warranty is limited to repairing or replacing (at Campbell's option) defective products, which shall be the sole and exclusive remedy under this warranty. The customer shall assume all costs of removing, reinstalling, and shipping defective products to Campbell. Campbell will return such products by surface carrier prepaid within the continental United States of America. To all other locations, Campbell will return such products best way CIP (Port of Entry) INCOTERM[®] 2010, prepaid. This warranty shall not apply to any Campbell products which have been subjected to modification, misuse, neglect, improper service, accidents of nature, or shipping damage. This warranty is in lieu of all other warranties, expressed or implied. The warranty for installation services performed by Campbell such as programming to customer specifications, electrical connections to products manufactured by Campbell, and product specific training, is part of Campbell's product warranty. **CAMPBELL EXPRESSLY DISCLAIMS AND EXCLUDES ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** Campbell is not liable for any special, indirect, incidental, and/or consequential damages.

Products may not be returned without prior authorization. The following contact information is for US and International customers residing in countries served by Campbell Scientific, Inc. directly. Affiliate companies handle repairs for customers within their territories. Please visit www.campbellsci.com to determine which Campbell Scientific company serves your country.

To obtain a Returned Materials Authorization (RMA), contact Campbell Scientific, Inc., phone (435) 753-2342. After an applications engineer determines the nature of the problem, an RMA number will be issued. Please write this number clearly on the outside of the shipping container. Campbell Scientific's shipping address is:

CAMPBELL SCIENTIFIC, INC.

RMA#_____

815 West 1800 North

Logan, Utah 84321-1784

For all returns, the customer must fill out a "Declaration of Hazardous Material and Decontamination" form and comply with the requirements specified in it. The form is available from our website at www.campbellsci.com/repair. A completed form must be either emailed to repair@campbellsci.com or faxed to 435-750-9579. Campbell Scientific will not process any returns until we receive this form. If the form is not received within three days of product receipt or is incomplete, the product will be returned to the customer at the customer's expense. Campbell Scientific reserves the right to refuse service on products that were exposed to contaminants that may cause health or safety concerns for our employees.

SP10, SP10R, SP20, and SP20R Table of Contents

PDF viewers note: These page numbers refer to the printed version of this document. Use the Adobe Acrobat® bookmarks tab for links to specific sections.

1. General	1
2. Specifications	1
3. Installation	2
3.1 Mounting	2
3.2 Orientation	4
4. Maintenance	5
5. Power Considerations	5
5.1 Solar Power and Lead Acid Batteries	5
5.2 Voltage Regulator	6

Appendix

A. Solar Panel Connector	A-1
---------------------------------------	-----

Figures

1. Solar Panel Mounting	3
2. Regulated Solar Panel and External Battery	3
3. Angle Settings on Mounting Bracket	4
4. Solar Panel Orientation	5
A-1. Connector Wiring	A-1

Tables

1. Solar Panel Tilt Angle	4
2. Configurations for Desired Angles	5

SP10, SP10R, SP20, and SP20R Solar Panels

1. General

Solar panels provide a photovoltaic power source for charging lead acid batteries.

The SP10 10-watt and SP20 20-watt solar panels are intended to recharge the Gel Cell lead acid batteries incorporated in the PS100, CR3000, CR5000, CR7, and CR9000(X), as well as the BP12 and BP24 battery packs. A CH100 is also required when recharging a BP12 or BP24.

The SP10 and SP20 have two leads stripped and tinned to insert into the terminals labeled CHARGE on the PS100, CH100, or CR9000(X). The two wires attach to the green connector on the side of a CR3000 or CR5000 datalogger. With a CR7, the two wires from the solar panel are inserted into the terminals marked SOLAR PANEL located underneath the 700X Control Module. An external Gel Cell or AGM lead acid battery can be connected to the CR7 at the terminals marked EXTERNAL BATTERY next to the SOLAR PANEL terminals.

The SP10 or SP20 must have a connector (Part No. 788) to plug into the retired 21XL Micrologger. See Appendix A for details.

The SP10R 10-watt and SP20R 20-watt regulated solar panels have two stripped and tinned leads for connection to a user-supplied flooded lead acid battery such as a deep-cycle marine or RV battery.

2. Specifications

	SP10/SP10R	SP20/SP20R
Typical peak power (Pp)	10 W	20 W
Voltage @ peak power (Vpp) (voltage from solar panel before regulator)	17.5 V	17.1 V
Current @ peak power (Ipp)	0.57 A	1.17 A
Guaranteed minimum peak power	9 W	18 W
Approximate effect of temperature on power	-0.37%/°C	-0.38%/°C
Length, cm	42.0	50.1
Width, cm	26.9	42.2
Depth, cm	2.3	5.0
Weight, kg	1.50	2.95

NOTE

The above solar panel characteristics assume a 1 kilowatt per square meter illumination and a solar panel temperature of 25°C. Individual panels may vary up to 10%. The output panel voltage increases as the panel temperature decreases.

Compatible batteries:

SP10/SP20

12 V Gel Cell or AGM lead acid batteries such as the batteries used with the PS100, BP12, BP24, CR3000, CR5000, CR7, and CR9000(X).

SP10R/SP20R

User-supplied 12 V flooded batteries such as a deep cycle marine or RV battery.

3. Installation

3.1 Mounting

The panel should be mounted facing south if located in the Northern Hemisphere, or facing north in the Southern Hemisphere. The solar panel mounts to the mast or leg of a tripod, or any 1 5/8" schedule 40 pipe, see Figure 1. The panel should be mounted to the pipe using the U-bolts and 5/16 NC (course) nuts provided with the solar panel. The nuts fastening the bracket to the pipe should be as tight as possible without bending the bracket.

If the SP10 or SP20 solar panel is being used, route the solar panel cable to the datalogger power supply and charging circuitry. If the SP10R or SP20R is being used, attach the leads of the solar panel directly to the external battery with a user supplied connector. Figure 2 shows an example of a regulated solar panel connected to an external battery to run a radiotelemetry system.

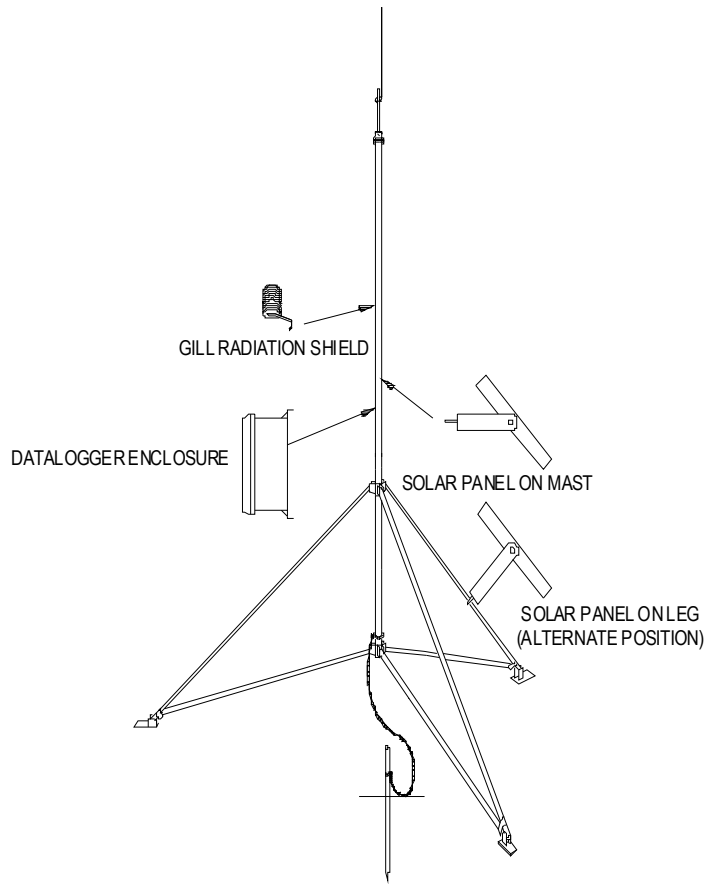


FIGURE 1. Solar Panel Mounting

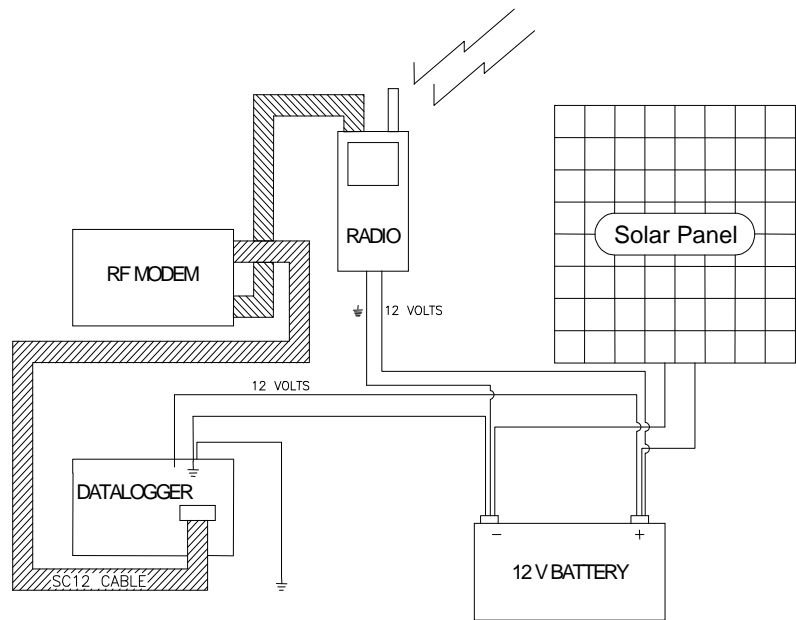


FIGURE 2. Regulated Solar Panel and External Battery

3.2 Orientation

The solar panel should be oriented to receive maximum insolation (incident solar radiation) over the course of a year. Suggested tilt angles of the solar panel are given in Table 1.

After determining the tilt angle, loosen the 5/16" nuts on each side of the solar panel, adjust the panel, and tighten the two nuts to secure the position. See Figure 4.

<u>Site Latitude (N or S)</u>	<u>Tilt Angle</u>
0 – 10°	10°
11 – 20°	Latitude +5°
21 – 45	Latitude +10°
46 – 65	Latitude +15°
> 65	80°

* From "Design Aids for Small PV Power Systems", Solorex Corp.

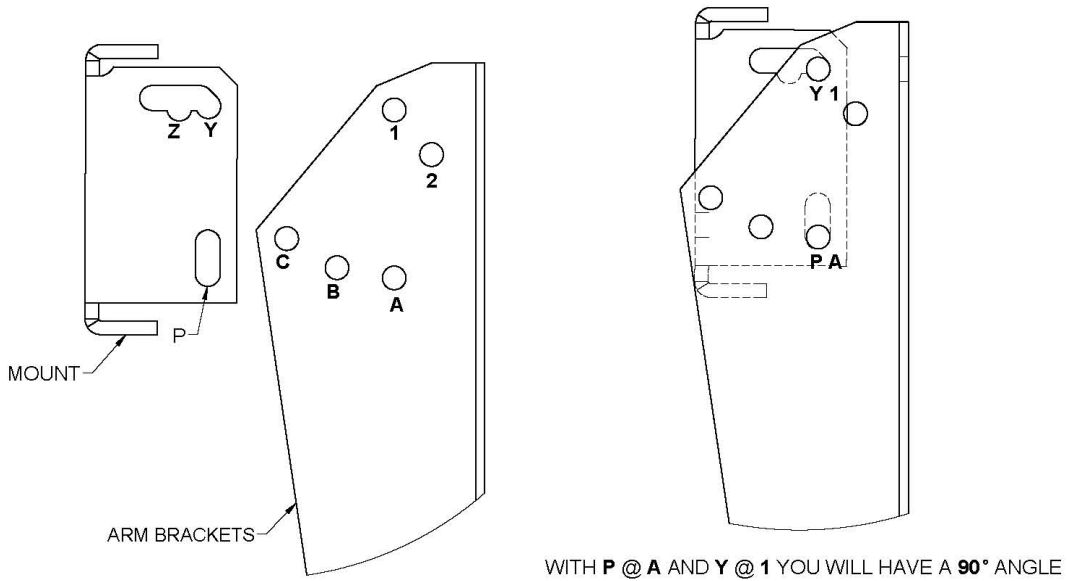


FIGURE 3. Angle Settings on Mounting Bracket of SP20

TABLE 2. Configurations for Desired Angles of SP20

Hole Locations	Angle
Holes P and A Aligned with Holes 1 and Y	90
Holes P and A Aligned with Holes 1 and Z	80
Holes P and B Aligned with Holes 1 and Y	70
Holes P and B Aligned with Holes 1 and Z	60
Holes P and C Aligned with Holes 1 and Y	50
Holes P and C Aligned with Holes 1 and Z	40
Holes P and C Aligned with Holes 2 and Y	30
Holes P and C Aligned with Holes 2 and Z	20

4. Maintenance

An occasional cleaning of the glass improves the solar panel's efficiency.

If a problem with the solar panel is suspected, the panel may be checked by measuring the voltage output. Check the voltage with a voltmeter connected between the two leads of the solar panel. There must be solar radiation incident on the panel and there must be a load connected to the solar panel. The load can be the datalogger, other equipment, or a 75 ohm resistor capable of dissipating solar panel power between the two leads. No voltage output implies a bad solar panel, regulator, or cable. The magnitude of the voltage output depends on the incident solar radiation.

5. Power Considerations

5.1 Solar Power and Lead Acid Batteries

The solar panel converts light energy to electricity, or specifically direct current. The direct current produced is used as a charging source for lead acid batteries.

The solar panel operates in both direct and diffuse light (cloudy days), but not at night.

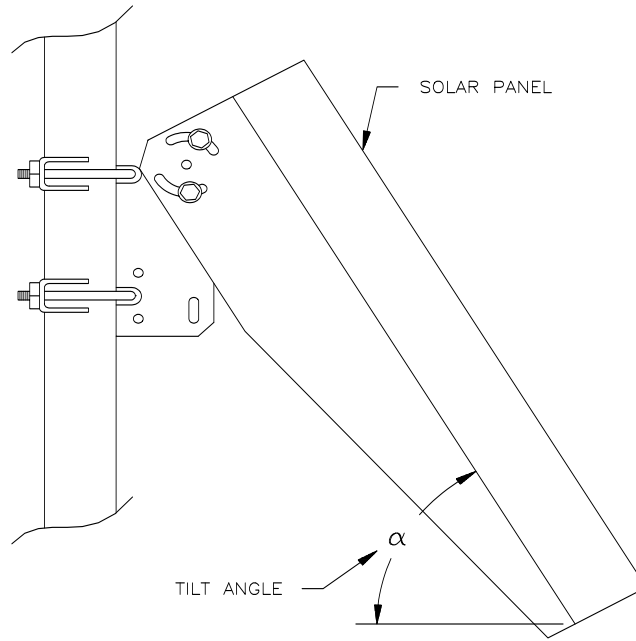


FIGURE 4. Solar Panel Orientation

The minimum battery size and solar panel output required depends on 1) the average current drain of the system, 2) the maximum time the battery must supply power to the system without being charged, and 3) the location of the site. When some batteries are discharged below a specified voltage, the battery becomes damaged and cannot be recharged.

The battery supplies power directly to the operating system, the solar panel supplies power to recharge the battery. Therefore, on the average, the solar panel must provide at least as much power to the battery as is being used by the system.

The battery must have enough capacity to power the system during times of no charging (night) or low charging (stormy winter days).

5.2 Voltage Regulator

The solar panel must be regulated either with a Campbell Scientific regulator or an attached regulator. The regulator has two basic functions: 1) blocks any current flow from the battery to the solar panel, and 2) limits the source current to the battery.

The SP10 and SP20 must be connected to a Campbell Scientific voltage regulator. Campbell Scientific voltage regulators include the PS100, CH100, and the voltage regulator integrated in the base of our CR3000, CR5000, CR7, and CR9000(X) dataloggers.

The SP10R and SP20R have an on-board voltage regulator that connects directly to a user-supplied flooded lead-acid battery such as a deep-cycle marine or RV battery.