



## EE181

### Temperature and Relative Humidity Probe



# Please read first

---

## About this manual

Please note that this manual was produced by Campbell Scientific Inc. primarily for the North American market. Some spellings, weights and measures may reflect this. In addition, while most of the information in the manual is correct for all countries, certain information is specific to the North American market and so may not be applicable to European users. Differences include the U.S. standard external power supply details where some information (for example the AC transformer input voltage) will not be applicable for British/European use. Please note, however, *that when a power supply adapter is ordered from Campbell Scientific it will be suitable for use in your country.*

Reference to some radio transmitters, digital cell phones and aerials (antennas) may also not be applicable according to your locality. Some brackets, shields and enclosure options, including wiring, are not sold as standard items in the European market; in some cases alternatives are offered.

## Recycling information for countries subject to WEEE regulations 2012/19/EU



At the end of this product's life it should not be put in commercial or domestic refuse but sent for recycling. Any batteries contained within the product or used during the products life should be removed from the product and also be sent to an appropriate recycling facility, per [The Waste Electrical and Electronic Equipment \(WEEE\) Regulations 2012/19/EU](#). Campbell Scientific can advise on the recycling of the equipment and in some cases arrange collection and the correct disposal of it, although charges may apply for some items or territories. For further support, please contact Campbell Scientific, or your local agent.

# Table of contents

---

<b>1. Introduction</b>	<b>1</b>
<b>2. Precautions</b>	<b>1</b>
<b>3. Initial inspection</b>	<b>1</b>
<b>4. QuickStart</b>	<b>2</b>
<b>5. Overview</b>	<b>4</b>
<b>6. Specifications</b>	<b>5</b>
6.1 Temperature measurement	5
6.2 Relative humidity measurement	6
<b>7. Installation</b>	<b>7</b>
7.1 Wiring to data logger	7
7.2 Data logger programming	7
7.2.1 VoltSE() instruction	8
7.3 Mounting	8
7.3.1 Shield installation	10
7.3.1.1 Installation in a RAD10E 10-plate shield	11
7.3.1.2 Installation in a 41003-5 10-plate shield	11
7.3.2 Mount the shield	11
<b>8. Operation</b>	<b>12</b>
8.1 Measurement details	12
8.2 Low power operation	12
8.3 Long cable lengths	13
8.4 Absolute humidity	13
8.4.1 Measurement below 0 °C	14
<b>9. Troubleshooting and maintenance</b>	<b>15</b>
9.1 Troubleshooting	15
9.2 Maintenance	15

<b>10. Attributions and References .....</b>	<b>16</b>
<b>Appendix A. Importing Short Cut code into CRBasic Editor .....</b>	<b>18</b>
<b>Appendix B. Example programs .....</b>	<b>19</b>

# 1. Introduction

---

The EE181 is a rugged, accurate temperature and relative humidity probe that is ideal for long-term, unattended applications in all climates. The probe uses an E+E Elektronik® capacitive RH element with a proprietary coating to measure relative humidity and a 1000  $\Omega$  PRT to measure temperature. For optimum results, the EE181 should be recalibrated annually.

For Edlog data logger support, contact Campbell Scientific.

## 2. Precautions

---

- READ AND UNDERSTAND the [Safety](#) section at the back of this manual.
- Care should be taken when opening the shipping package to not damage or cut the cable jacket. If damage to the cable is suspected, contact Campbell Scientific.
- Although the EE181 is rugged, it should be handled as a precision scientific instrument.
- Do not touch the sensor element.
- Santoprene® rubber, which composes the black outer jacket of the cable, will support combustion in air. It is used because of its resistance to temperature extremes, moisture, and UV degradation. It is rated as slow burning when tested according to U.L. 94 H.B. and passes FMVSS302. However, local fire codes may preclude its use inside buildings.



## 3. Initial inspection

---

- Upon receipt of the EE181, inspect the packaging and contents for damage. File damage claims with the shipping company.
- The model number and cable length are printed on a label at the connection end of the cable. Check this information against the shipping documents to ensure the expected product and cable length were received.


# 4. QuickStart

A video that describes data logger programming using *Short Cut* is available at:


[www.campbellsci.com/videos/cr1000x-data-logger-getting-started-program-part-3](http://www.campbellsci.com/videos/cr1000x-data-logger-getting-started-program-part-3) . *Short Cut* is an easy way to program your data logger to measure the sensor and assign data logger wiring terminals. *Short Cut* is available as a download on [www.campbellsci.com](http://www.campbellsci.com) . It is included in installations of *LoggerNet*, *RTDAQ*, and *PC400*.

Use the following procedure to get started.

1. Open *Short Cut* and click **Create New Program**.
2. Double-click the data logger model.
3. In the **Available Sensors and Devices** box, type EE181 or locate the sensor in the **Sensors > Meteorological > Relative Humidity & Temperature > EE181 Temperature and Relative Humidity Sensor** folder. Double-click either **EE181 (constant power)** or **EE181 (panel switched power)**; the panel switched power option uses less current but requires a scan rate that is greater than 5 seconds. Data defaults to degree Celsius. This can be changed by clicking the **Deg C** box and selecting **Deg F**, for degrees Fahrenheit, or **K** for Kelvin.

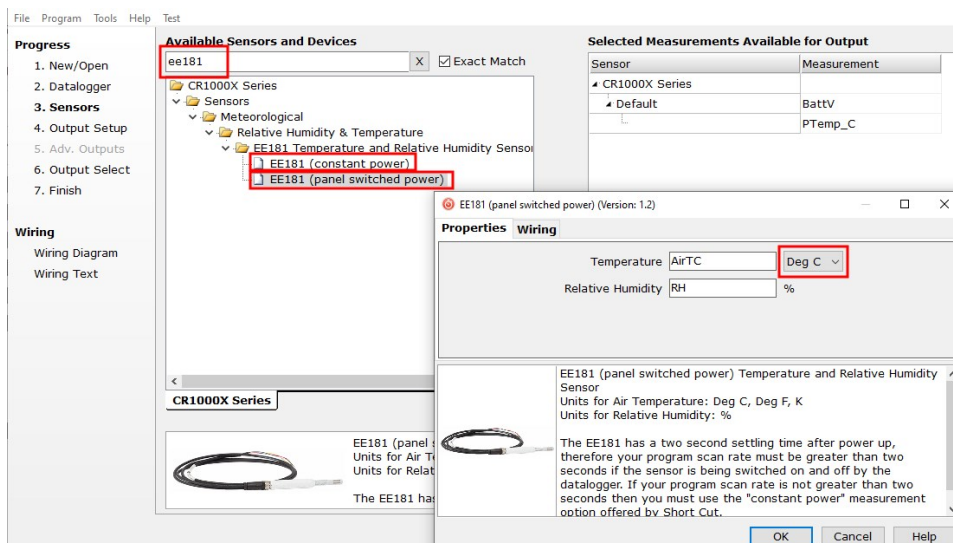


- Click the **Wiring** tab to see how the sensor is to be wired to the data logger. Click **OK** after wiring the sensor.

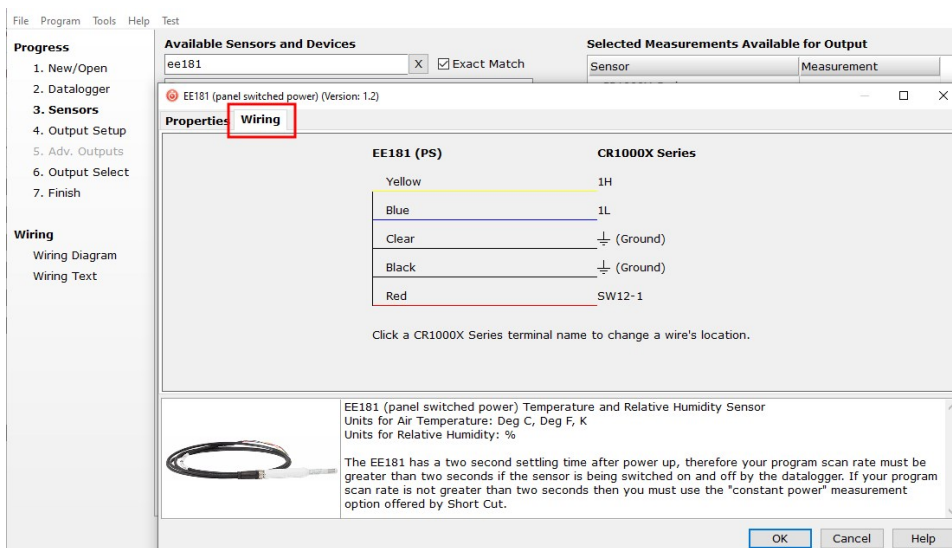


- Repeat steps three and four for other sensors.
- In **Output Setup**, type the scan rate, meaningful table names, and **Data Output Storage Interval**.

#### NOTE:

The EE181 has a two second settling time after power up; therefore, the scan rate must be greater than two seconds when using the panel switched power option.

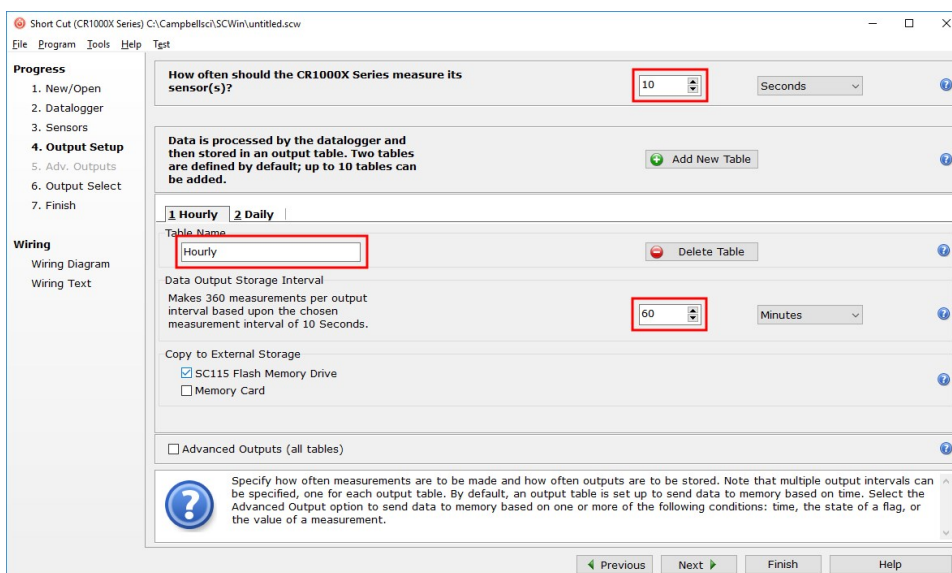

7. Select the measurement and its associated output option.

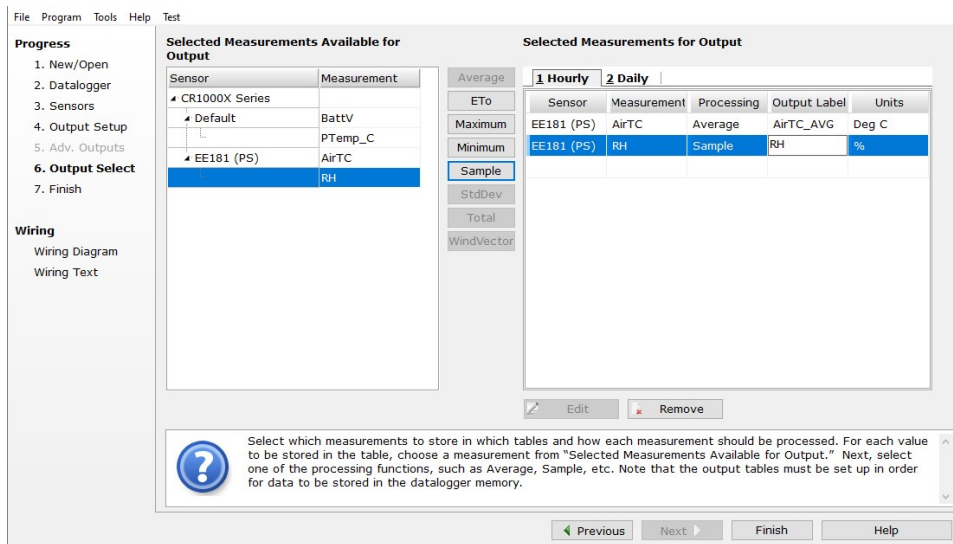

8. Click **Finish** and save the program. Send the program to the data logger if the data logger is connected to the computer.
9. If the sensor is connected to the data logger, check the output of the sensor in the data display in **LoggerNet**, **RTDAQ**, or **PC400** to make sure it is making reasonable measurements.

## 5. Overview

The EE181 is a digital probe with linear voltage outputs for temperature and humidity. Its voltage signals are measured with two single-ended inputs on the data logger.

Campbell Scientific recommends 12 V power when used with our data loggers. When minimizing power use is important, power can be switched on and off for the measurement, provided there is a two-second warm-up delay. Switching power avoids constant current flow through data logger ground, which can affect the accuracy of low-level single-ended voltage measurements.

The EE181 uses a metal mesh filter with excellent response, protection against dust, and no water absorption.

### Features:


- Well-suited for long-term, unattended applications
- Accurate and rugged



- Compatible with the following CRBasic data loggers: GRANITE-series, CR6, CR1000Xe, CR1000X, CR350-series, CR300-series, CR800-series, CR1000

## 6. Specifications

---

Operating temperature:	–40 to 60 °C
Storage temperature:	–40 to 80 °C
Probe length:	160 mm (6.3 in), 172 mm (6.77 in) including connector
Probe diameter:	21 mm (0.83 in)
Weight with 5 m cable:	290 g (10.2 oz)
Housing:	Plastic material / IP65
Filter:	30 µm pore size, stainless steel mesh
Power consumption:	<1.2 mA at 12 V
Supply voltage (using Campbell Scientific cable):	7 to 30 VDC (12 VDC recommended)
Start-up time:	2 s typical
Maximum cable length:	97.5 m (320 ft) with 12 V power
Analog outputs	
Offset at 0 V:	±3 mV (maximum)
Deviation from digital signal:	< ±1 mV (0.1 °C, 0.1% RH)
Compliance:	View the EU Declaration of Conformity at <a href="http://www.campbellsci.com/ee181-I">www.campbellsci.com/ee181-I</a> 

### 6.1 Temperature measurement


Sensor:	Pt1000 Class A
Measurement range:	–40 to 60 °C
Output signal range:	0 to 1.0 V
Accuracy at 23 °C:	±0.2 °C
Long term stability:	<0.1 °C/year

Sensor time constant [63% step  
change (1 m/s air flow at sensor)]

Standard PE filter:  $\leq 22$  s

Optional Teflon filter:  $\leq 30$  s

Accuracy over measurement range:

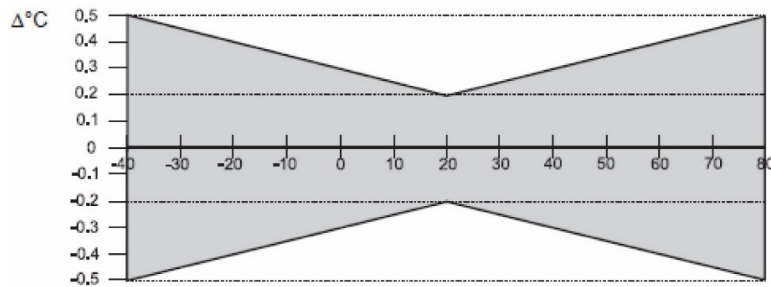

## 6.2 Relative humidity measurement

Sensor: HC101

Measurement range: 0 to 100% non-condensing

Output signal range: 0 to 1.0 VDC

Accuracy\*

(including hysteresis, non-linearity  
and repeatability, traceable to  
international standards,  
administered by NIST, PTB, BEV)

–15 to 40 °C:  $\leq 90\%$  RH  $\pm (1.3 + 0.003 \cdot \text{RH reading}) \% \text{ RH}$

–15 to 40 °C:  $> 90\%$  RH  $\pm 2.3\% \text{ RH}$

–25 to 60 °C:  $\pm (1.4 + 0.01 \cdot \text{RH reading}) \% \text{ RH}$

–40 to 60 °C:  $\pm (1.5 + 0.015 \cdot \text{RH reading}) \% \text{ RH}$

Typical long-term stability:  $< 1\% \text{ RH per year}$

Sensor time constant [63% of a 35  
to 80% RH step change (1 m/s air  
flow at sensor)]

Standard PE filter:  $\leq 22$  s

Optional Teflon filter:  $\leq 30$  s

\* The accuracy statement includes the uncertainty of the factory calibration with an enhancement factor k=2 (2-times standard deviation).

The accuracy was calculated in accordance with EA-4/02 and with regard to GUM (Guide to the Expression of Uncertainty in Measurement).

# 7. Installation

If you are programming your data logger with *Short Cut*, skip [Wiring to data logger](#) (p. 7) and [Data logger programming](#) (p. 7). *Short Cut* does this work for you. See [QuickStart](#) (p. 2) for a *Short Cut* tutorial.

## 7.1 Wiring to data logger

Connections to Campbell Scientific data loggers for measuring humidity and temperature using two single-ended analog inputs are given in [Table 7-1](#) (p. 7). See [Long cable lengths](#) (p. 13) for a discussion on errors caused by long cable lengths.

Table 7-1: Wire color, function, and data logger connection for single-ended measurement		
Wire color	Wire function	Data logger connection terminal
Yellow	Temperature signal	U configured for single-ended analog input <sup>1</sup> , SE (single-ended, analog-voltage input)
Blue	Relative humidity signal	U configured for single-ended analog input, SE
Black	Signal reference	⏏ (analog ground)
Clear	Shield	⏏
Red	Power	12V or SW12V
<sup>1</sup> U terminals are automatically configured by the measurement instruction.		

## 7.2 Data logger programming

*Short Cut* is the best source for up-to-date programming code for Campbell Scientific data loggers. If your data acquisition requirements are simple, you can probably create and maintain a data logger program exclusively with *Short Cut*. If your data acquisition needs are more complex, the files that *Short Cut* creates are a great source for programming code to start a new program or add to an existing custom program.

**NOTE:**

*Short Cut* cannot edit programs after they are imported and edited in *CRBasic Editor*.

A *Short Cut* tutorial is available in [QuickStart](#) (p. 2). If you wish to import *Short Cut* code into *CRBasic Editor* to create or add to a customized program, follow the procedure in [Importing Short Cut code into CRBasic Editor](#) (p. 18). Programming basics for CRBasic data loggers are provided in the following sections. Complete program examples for select data loggers can be found in [Example programs](#) (p. 19).

Measure the EE181 with the **Vo1tSE()** measurement instruction as described in the following section.

For a discussion on errors caused by long cable lengths, see [Long cable lengths](#) (p. 13).

## 7.2.1 Vo1tSE() instruction

When cable lengths are shorter than 6.1 meters or when power is switched, use the **Vo1tSE()** measurement instruction to measure the temperature and relative humidity. The EE181 output scale is 0 to 1000 millivolts for the temperature range of –40 to 60 °C and for the relative humidity range of 0 to 100%.

**Vo1tSE**(Dest, Reps, Range, SEChan, MeasOff, SettlingTime, Integ/FNotch, Mu1t, Offset)

Variations:

- Temperature reported as °C – set **Mu1t** to 0.1 and **Offset** to –40
- Temperature reported as °F – set **Mu1t** to .18 and **Offset** to –40
- Humidity reported as a percent – set **Mu1t** to 0.1 and **Offset** to 0
- Humidity reported as a fraction – set **Mu1t** to 0.001 and **Offset** to 0

**NOTE:**

When the probe is connected to a CS110 Electric Field Meter, the probe is measured by the CS110 internal CR1000 data logger module using **Vo1tSE()** instructions. Relative humidity and temperature signals are measured on single-ended terminals 1 and 2, respectively. 250 µs integration should be used in the **Vo1tSE()** instructions.

## 7.3 Mounting

Sensors should be located over an open level area at least 9 m (EPA) in diameter. The surface should be covered by short grass or the natural earth surface where grass does not grow. Sensors should be located at a distance of at least four times the height of any nearby

obstruction, and at least 30 m (EPA) from large, paved areas. Sensors should be protected from thermal radiation, and adequately ventilated.

Standard measurement heights:

- 1.5 m (AASC)
- 1.25 to 2.0 m (WMO)
- 2.0 m (EPA)


See [Attributions and References](#) (p. 16) for a list of references that discuss temperature and relative humidity sensors.

When used in the field, the EE181 must be housed in a radiation shield such as the RAD10E naturally aspirated shields.

The white color of these shields reflects solar radiation, and the louvered construction allows air to pass freely through, thereby keeping the probe at or near ambient temperature. The RAD10E uses a double-louvered design that offers improved sensor protection from insect intrusion and driving rain and snow. In addition, the RAD10E shield has lower self-heating in bright sunlight combined with higher temperatures ( $> 24\text{ }^{\circ}\text{C}$  ( $75\text{ }^{\circ}\text{F}$ )) and low wind speeds ( $< 2\text{ m/s}$  ( $4.5\text{ mph}$ )), giving a better measurement.

The RAD10E radiation shield attaches to a crossarm, mast, or user-supplied pipe with a 2.5 to 5.3 cm (1.0 to 2.1 in) outer diameter. See [Figure 7-2](#) (p. 12) for an example of shield mounting.

The optimal location for the EE181 sensor tip inside a multi-plate shield is approximately 1/3 to 1/2 of the way down from the top shield plate. With a ten-plate shield, the tip of the EE181 should be located around three to four plates down from the top of the shield. See [Figure 7-1](#) (p. 10).

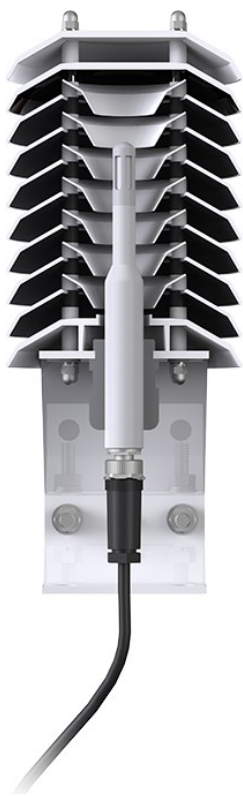

*Figure 7-1. EE181 sensor placement in a RAD10E multi-plate shield*

Tools required:

- 1/2 inch open-end wrench
- small screwdriver provided with data logger
- UV-resistant cable ties
- small pair of diagonal-cutting pliers
- Adjustable wrench with a minimum 1-7/8 inch jaw size

Attach the probe to the cable by aligning the keyed connectors, pushing the connectors together, and finger tightening the knurled ring.

**CAUTION:**

Only finger tighten the knurled ring. Using a wrench may damage the connector.

## 7.3.1 Shield installation

Campbell Scientific recommends the EE181 with the MetSpec RAD10E multi-plate radiation shield due to shield performance in bright sunlight and low wind speeds as well as over snow or reflective surfaces. The EE181 will work with the RM Young 10-plate shield but requires an adapter to accommodate sensor girth.

**NOTE:**

Do not mount the shield or route the sensor cable into the enclosure until after the EE181 is installed inside the shield.

### 7.3.1.1 Installation in a RAD10E 10-plate shield

1. Loosen the nut on the entry gland at the bottom of the shield.
2. Insert sensor into the bottom of the multi-plate shield. Situate the gland so it's 1.25 to 2.5 cm (0.5 to 1 in) above the sensor connector. See [Figure 7-1](#) (p. 10).
3. Using an adjustable wrench, tighten down the nut on the gland until the sensor is held firmly in place. Do not overtighten.

### 7.3.1.2 Installation in a 41003-5 10-plate shield

1. Slide the adapter over the sensor body and situate the adapter so it's 1.25 to 2.5 cm (0.5 to 1 in) above the sensor connector.
2. Insert sensor and adapter into the bottom of the multi-plate shield.
3. Hold the collar and sensor and finish threading the collar into the shield by hand. Tighten the collar around the probe until it firmly grips the body of the probe. Use an adjustable wrench if necessary, but do not overtighten the collar.

## 7.3.2 Mount the shield

1. Attach the radiation shield to the tripod mast, crossarm, or tower leg using the supplied U-bolt. See [Figure 7-2](#) (p. 12) for an example of shield mounting.
2. Route the cable to the data logger, and secure the cable to the mounting structure using cable ties.

**CAUTION:**

Failure to secure the cable can lead to breakage of the wires due to fatigue caused by blowing back and forth in the wind.



Figure 7-2. EE181 and RAD10E solar radiation shield on a tripod mast

## 8. Operation

---

8.1 Measurement details .....	12
8.2 Low power operation .....	12
8.3 Long cable lengths .....	13
8.4 Absolute humidity .....	13
8.4.1 Measurement below 0 °C .....	14

### 8.1 Measurement details

The probe uses E+E Elektronik coated HC101 capacitive sensor to measure RH and a 1000  $\Omega$  PRT to measure temperature. Campbell Scientific data loggers measure the analog voltage outputs of the EE181 Temperature and Relative Humidity Probe with the [VoltSEC\(\)](#) measurement instruction.

### 8.2 Low power operation

The EE181 draws less than 1.2 mA powered from 12 V. The EE181 can be continuously powered from the **12V** terminal, or power can be switched with the **SW12V** terminal to conserve battery life.



When power is switched, a two-second warm-up period is required. This is programmed with the `Delay()` instruction, using 0 for the delay option.

## 8.3 Long cable lengths

Long cable lengths cause errors in the measured temperature and relative humidity. The approximate error in temperature and relative humidity is 0.31 °C and 0.31% per 100 feet of cable length, respectively.

When long cable lengths are required and the above errors in temperature and relative humidity are unacceptable, use the HMP155A temperature and relative humidity probe instead.

Understanding the following details are not required for the general operation of the EE181 with Campbell Scientific data loggers. The signal reference and the power ground (black) are the same wire in the EE181. When the EE181 temperature and relative humidity are measured, both the signal reference and power ground are connected to ground at the data logger. The signal reference/power ground wire serves as the return path for 12 V. There will be a voltage drop along this wire because the wire has resistance. The EE181 draws approximately 1.2 mA (worst case) when it is powered. The wire used in the EE181 has resistance of 25.67 Ω/1000 feet. Using Ohm's law, the voltage drop ( $V_d$ ), along the signal reference/power ground wire, is given by [Eq. 1](#) (p. 13).

$$\begin{aligned} V_d &= I \times R \\ &= 1.2 \text{ mA} \times 25.67 \text{ } \Omega / 1000 \text{ ft} \\ &= 30.804 \text{ mV} / 1000 \text{ ft} \end{aligned} \tag{Eq. 1}$$

This voltage drop will raise the apparent temperature and relative humidity because the difference between the signal and signal reference at the data logger has increased by  $V_d$ .

## 8.4 Absolute humidity

The EE181 measures relative humidity. Relative humidity is defined by the following equation:

$$RH = \frac{e}{e_s} \times 100 \tag{Eq. 2}$$

where RH is the relative humidity,  $e$  is the vapor pressure in kPa, and  $e_s$  is the saturation vapor pressure in kPa. The vapor pressure,  $e$ , is an absolute measure of the amount of water vapor in the air and is related to the dewpoint temperature. The saturation vapor pressure is the maximum amount of water vapor that air can hold at a given air temperature. The relationship between dewpoint and vapor pressure, and air temperature and saturation vapor pressure are given by Goff and Gratch (1946), Lowe (1977), and Weiss (1977). Relative humidity is relative to

saturation above water, even below freezing point. This is why these sensors should not measure 100% RH below zero degrees C, as described in [Measurement below 0 °C](#) (p. 14).

When the air temperature increases, so does the saturation vapor pressure. Conversely, a decrease in air temperature causes a corresponding decrease in saturation vapor pressure. It follows then from [Eq. 2](#) (p. 13) that a change in air temperature will change the relative humidity, without causing a change absolute humidity.

For example, for an air temperature of 20 °C and a vapor pressure of 1.17 kPa, the saturation vapor pressure is 2.34 kPa and the relative humidity is 50%. If the air temperature is increased by 5 °C and no moisture is added or removed from the air, the saturation vapor pressure increases to 3.17 kPa and the relative humidity decreases to 36.9%. After the increase in air temperature, the air can hold more water vapor. However, the actual amount of water vapor in the air has not changed. Thus, the amount of water vapor in the air, relative to saturation, has decreased.

Because of the inverse relationship between relative humidity and air temperature, finding the mean relative humidity is meaningless. A more useful quantity is the mean vapor pressure. The mean vapor pressure can be computed online by the data logger (see [CRBasic Example 2](#) (p. 20)).

## 8.4.1 Measurement below 0 °C

The EE181 provides a humidity reading that is referenced to the saturated water vapor pressure above liquid water, even at temperatures below 0 °C, where ice might form. This is the common way to express relative humidity and is as defined by the World Meteorological Organization. If an RH value is required referenced to ice, the EE181 readings will need to be corrected.

One consequence of using water as the reference is that the maximum humidity that will normally be output by the sensor for temperatures below freezing is as follows:

100% RH at 0 °C	82% RH at –20 °C
95% RH at –5 °C	78% RH at –25 °C
91% RH at –10 °C	75% RH at –30 °C
87% RH at –15 °C	

In practical terms this means that, for instance, at –20 °C the air is effectively fully saturated when the sensor outputs 82% RH.

# 9. Troubleshooting and maintenance

---

## NOTE:

All factory repairs and recalibrations require a returned materials authorization (RMA) and completion of the “Declaration of Hazardous Material and Decontamination” form. Refer to the [Assistance](#) page at the end of this manual for more information.

## 9.1 Troubleshooting

Symptom: Relative Humidity is reported as –9999, NAN, –40 °C, or 0%

1. Check that the sensor is wired to the correct analog input terminals as specified by the measurement instructions.
2. Verify the range code for the single-ended measurement instruction is correct for the data logger type.
3. Verify the red power wire is correctly wired to the **12V** or **SW12V** terminal. The terminal the wire is connected to will depend on the data logger program.

Connect the red wire to a **12V** terminal to constantly power the sensor for troubleshooting purposes. With the red wire connected to 12V, a voltmeter can be used to check the output voltage for temperature and relative humidity on the yellow and blue wires respectively (temperature °C = mV • 0.1 – 40.0; relative humidity % = mV • 0.1).

Symptom: Incorrect temperature or relative humidity

1. Verify the multiplier and offset parameters are correct for the desired units ([VoltSE\(\) instruction](#) [p. 8]).

## 9.2 Maintenance

The EE181 probe requires minimal maintenance, but dust, debris, and salts on the filter cap will degrade sensor performance. Check the metal mesh filter on the end of the sensor for debris. If dirt or salt is engrained into the filter, it should be cleaned with distilled water or replaced. For particularly stubborn contamination, swish the entire probe tip in isopropyl alcohol (rubbing alcohol) and rinse off with distilled water. Make sure the filter is connected firmly with your fingers — do not over tighten.

Check the radiation shield monthly to make sure it is free from dust and debris. To clean the shield, remove the sensor from the shield. Dismount the shield. Brush all loose dirt off. If more effort is needed, use warm, soapy water and a soft cloth or brush to thoroughly clean the shield. Allow the shield to dry before remounting.

Replace filters that cannot be successfully cleaned. To replace the filter, unscrew the filter from the probe and pull it straight away, being careful not to bend or damage the sensors. Before putting on the replacement filter, check the alignment of the sensors with the probe, and if necessary, carefully correct the alignment before installing the filter.

A coating of salt (mostly NaCl) may build up on the radiation shield, sensor, filter and even the sensor element. A buildup of salt on the filter or sensors will delay or destroy the response to atmospheric humidity.

Long-term exposure of the relative humidity sensor to certain chemicals and gases may affect the characteristics of the sensor and shorten its life. The resistance of the sensor depends strongly on the temperature and humidity conditions and the length of the pollutant influence.

The sensor should be calibrated annually. Please refer to the [Limited warranty](#) and [Assistance](#) sections at the end of the manual for more information.

## 10. Attributions and References

---

E+E Elektronik® is a registered trademark of E+E Elektronik Ges.m.b.H.

Santoprene® is a registered trademark of Exxon Mobile Corporation.

AASC, 1985: The State Climatologist (1985) Publication of the American Association of State Climatologists: *Heights and Exposure Standards for Sensors on Automated Weather Stations*, v. 9, No. 4 October, 1985. ([www.stateclimate.org/publications/state-climatologist/NOAA-NCY-SCBOOKS-SC77097/00000029.pdf](http://www.stateclimate.org/publications/state-climatologist/NOAA-NCY-SCBOOKS-SC77097/00000029.pdf))

EPA, 2000: *Meteorological Monitoring Guidance for Regulatory Modeling Applications*, EPA-454/R-99-005. Office of Air Quality Planning and Standards, Research Triangle Park, North Carolina 27711.

EPA, 2008: *Quality Assurance Handbook for Air Pollution Measurement Systems*, Vol. IV, Meteorological Measurements, Ver. 2.0, EPA-454/B-08-002 (revised 2008). Office of Air Quality Planning and Standards, Research Triangle Park, NC 27711.

Goff, J. A. and S. Gratch, 1946: Low-pressure properties of water from -160° to 212°F, *Trans. Amer. Soc. Heat. Vent. Eng.*, **51**, 125-164.

- Lowe, P. R., 1977: An approximating polynomial for the computation of saturation vapor pressure, *J. Appl. Meteor.*, **16**, 100-103.
- Weiss, A., 1977: Algorithms for the calculation of moist air properties on a hand calculator, *Amer. Soc. Ag. Eng.*, **20**, 1133-1136.
- WMO, 2008. *Guide to Meteorological Instruments and Methods of Observation*. World Meteorological Organization No. 8, 7th edition, Geneva, Switzerland.

# Appendix A. Importing *Short Cut* code into *CRBasic Editor*

---


*Short Cut* creates a .DEF file that contains wiring information and a program file that can be imported into *CRBasic Editor*. By default, these files reside in the C:\campbellsci\SCWin folder.

Import *Short Cut* program file and wiring information into *CRBasic Editor*.

1. Create the *Short Cut* program, then save it. Click the **Advanced** tab then the **CRBasic Editor** button. Your program file will open in CRBasic with a generic name. Provide a meaningful name and save the CRBasic program. This program can now be edited for additional refinement.

**NOTE:**

Once the file is edited with *CRBasic Editor*, *Short Cut* can no longer be used to edit the program.

2. To add the *Short Cut* wiring information into the new CRBasic program, open the .DEF file located in the C:\campbellsci\SCWin folder. Copy the wiring information found at the beginning of the .DEF file.
3. Go into the CRBasic program and paste the wiring information at the beginning of the program.
4. In the CRBasic program, highlight the wiring information, right-click, and select **Comment Block**. This adds an apostrophe (') to the beginning of each of the highlighted lines, which instructs the data logger compiler to ignore those lines when compiling. The **Comment Block** feature is demonstrated at about 5:10 in the [CRBasic | Features](#) video .

# Appendix B. Example programs

The following examples are for the CR6 data logger. Other data loggers are programmed similarly.

## CRBasic Example 1: CR6 program measuring the EE181

```
'Program measures EE181 with single-ended inputs once every 5 seconds
'and stores the average temperature and a sample of the relative
'humidity every 60 minutes.

'Wiring Diagram
'=====
'EE181
'Wire CR6
'Color: Function - Terminal
'-----
'Red: Power - SW12-1
'Yellow: Temperature signal - U1
'Blue: Relative Humidity signal - U2
'Black: Power Ground - Ground Symbol
'Clear: Shield - Ground Symbol

Public AirTC : Units AirTC = °C
Public RH : Units RH = %

DataTable(Temp_RH,True,-1)
  DataInterval(0,60,Min,0)
  Average(1,AirTC,FP2,0)
  Sample(1,RH,FP2)
EndTable

BeginProg
  Scan(5,Sec,1,0)
    SW12 (1,1 ) 'Turn on switched 12V
    Delay(0,2,Sec) '2-second delay
    'EE181 Temperature & Relative Humidity Sensor measurements AirTC and RH:
    VoltSe(AirTC,1,mV1000,U1,0,0,60,0.1,-40)
    VoltSe(RH,1,mV1000,U2,0,0,60,0.1,0)
    SW12 (1,0 ) 'Turn off switched 12V
    CallTable(Temp_RH)
  NextScan
EndProg
```

## CRBasic Example 2: CR6 program that computes vapor pressure and saturation vapor pressure

*'Program measures EE181 with single-ended inputs once every 5 seconds  
'and stores the average temperature and a sample of the relative  
'humidity every 60 minutes.*

*'Wiring Diagram*

*'=====*

*'EE181*

*'Wire CR6*

*'Color: Function - Terminal*

*'-----*

*'Red: Power - SW12-1*

*'Yellow: Temperature signal - U1*

*'Blue: Relative Humidity signal - U2*

*'Black: Power Ground - Ground Symbol*

*'Clear: Shield - Ground Symbol*

Public AirTC : Units AirTC = °C

Public RH : Units RH = %

Public e\_Sat : Units e\_Sat = kPa

Public e\_kPa : Units e\_kPa = kPa

DataTable(Temp\_RH,True,-1)

  DataInterval(0,60,Min,0)

  Average(1,AirTC,FP2,0)

  Sample(1,RH,FP2)

  Sample(1,e\_kPa,IEEE4)

EndTable

BeginProg

  Scan(5,Sec,1,0)

    SW12 (1,1 ) *'Turn on switched 12V*

    Delay(0,2,Sec) *'2-second delay*

*'EE181 Temperature & Relative Humidity Sensor measurements*

*'AirTC and RH:*

    VoltSe(AirTC,1,mV1000,U1,0,0,60,0.1,-40.0)

    VoltSe(RH,1,mV1000,U2,0,0,60,0.1,0)

    SW12 (1,0 ) *'Turn off switched 12V*

*'Calculate Vapor Pressure*

*'Calculate Saturation Vapor Pressure*

    SatVP(e\_Sat, AirTC)

*'Compute Vapor Pressure, RH must be a fraction*

    e\_kPa = e\_Sat \* RH/100

    CallTable(Temp\_RH)

  NextScan

EndProg



# Limited warranty


---

Covered equipment is warranted/guaranteed against defects in materials and workmanship under normal use and service for the period listed on your sales invoice or the product order information web page. The covered period begins on the date of shipment unless otherwise specified. For a repair to be covered under warranty, the following criteria must be met:

1. There must be a defect in materials or workmanship that affects form, fit, or function of the device.
2. The defect cannot be the result of misuse.
3. The defect must have occurred within a specified period of time; and
4. The determination must be made by a qualified technician at a Campbell Scientific Service Center/ repair facility.

The following is not covered:

1. Equipment which has been modified or altered in any way without the written permission of Campbell Scientific.
2. Batteries; and
3. Any equipment which has been subjected to misuse, neglect, acts of God or damage in transit.


Campbell Scientific regional offices handle repairs for customers within their territories. Please see the back page of the manual for a list of [regional offices](#) or visit [www.campbellsci.com/contact](http://www.campbellsci.com/contact)  to determine which Campbell Scientific office serves your country. For directions on how to return equipment, see [Assistance](#).

Other manufacturer's products, that are resold by Campbell Scientific, are warranted only to the limits extended by the original manufacturer.

CAMPBELL SCIENTIFIC EXPRESSLY DISCLAIMS AND EXCLUDES ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Campbell Scientific hereby disclaims, to the fullest extent allowed by applicable law, any and all warranties and conditions with respect to the products, whether express, implied, or statutory, other than those expressly provided herein.

Campbell Scientific will, as a default, return warranted equipment by surface carrier prepaid. However, the method of return shipment is at Campbell Scientific's sole discretion. Campbell Scientific will not reimburse the claimant for costs incurred in removing and/or reinstalling equipment. This warranty and the Company's obligation thereunder is in lieu of all other


warranties, expressed or implied, including those of suitability and fitness for a particular purpose. Campbell Scientific is not liable for consequential damage.

In the event of any conflict or inconsistency between the provisions of this Warranty and the provisions of Campbell Scientific's Terms, the provisions of Campbell Scientific's Terms shall prevail. Furthermore, Campbell Scientific's Terms are hereby incorporated by reference into this Warranty. To view Terms and conditions that apply to Campbell Scientific, Logan, UT, USA, see [Terms and Conditions](#) . To view terms and conditions that apply to Campbell Scientific offices outside of the United States, contact the [regional office](#) that serves your country.

# Assistance

---

Products may not be returned without prior authorization. Please inform us before returning equipment and obtain a **return material authorization (RMA) number** whether the repair is under warranty/guarantee or not. See [Limited warranty](#) for information on covered equipment.

Campbell Scientific regional offices handle repairs for customers within their territories. Please see the back page of the manual for a list of [regional offices](#) or visit [www.campbellsci.com/contact](http://www.campbellsci.com/contact)  to determine which Campbell Scientific office serves your country.

When returning equipment, a RMA number must be clearly marked on the outside of the package. Please state the faults as clearly as possible. Quotations for repairs can be given on request.

It is the policy of Campbell Scientific to protect the health of its employees and provide a safe working environment. In support of this policy, when equipment is returned to Campbell Scientific, Logan, UT, USA, it is mandatory that a "[Declaration of Hazardous Material and Decontamination](#)" form be received before the return can be processed. If the form is not received within 5 working days of product receipt or is incomplete, the product will be returned to the customer at the customer's expense. For details on decontamination standards specific to your country, please reach out to your [regional Campbell Scientific](#) office.

## NOTE:

All goods that cross trade boundaries may be subject to some form of fee (customs clearance, duties or import tax). Also, some regional offices require a purchase order upfront if a product is out of the warranty period. Please contact your [regional Campbell Scientific](#) office for details.

# Safety

---

DANGER — MANY HAZARDS ARE ASSOCIATED WITH INSTALLING, USING, MAINTAINING, AND WORKING ON OR AROUND TRIPODS, TOWERS, AND ANY ATTACHMENTS TO TRIPODS AND TOWERS SUCH AS SENSORS, CROSSARMS, ENCLOSURES, ANTENNAS, ETC. FAILURE TO PROPERLY AND COMPLETELY ASSEMBLE, INSTALL, OPERATE, USE, AND MAINTAIN TRIPODS, TOWERS, AND ATTACHMENTS, AND FAILURE TO HEED WARNINGS, INCREASES THE RISK OF DEATH, ACCIDENT, SERIOUS INJURY, PROPERTY DAMAGE, AND PRODUCT FAILURE. TAKE ALL REASONABLE PRECAUTIONS TO AVOID THESE HAZARDS. CHECK WITH YOUR ORGANIZATION'S SAFETY COORDINATOR (OR POLICY) FOR PROCEDURES AND REQUIRED PROTECTIVE EQUIPMENT PRIOR TO PERFORMING ANY WORK.

Use tripods, towers, and attachments to tripods and towers only for purposes for which they are designed. Do not exceed design limits. Be familiar and comply with all instructions provided in product manuals. Manuals are available at [www.campbellsci.com](http://www.campbellsci.com) You are responsible for conformance with governing codes and regulations, including safety regulations, and the integrity and location of structures or land to which towers, tripods, and any attachments are attached. Installation sites should be evaluated and approved by a qualified engineer. If questions or concerns arise regarding installation, use, or maintenance of tripods, towers, attachments, or electrical connections, consult with a licensed and qualified engineer or electrician.

## General

- Protect from over-voltage.
- Protect electrical equipment from water.
- Protect from electrostatic discharge (ESD).
- Protect from lightning.
- Prior to performing site or installation work, obtain required approvals and permits. Comply with all governing structure-height regulations, such as those of the FAA in the USA.
- Use only qualified personnel for installation, use, and maintenance of tripods and towers, and any attachments to tripods and towers. The use of licensed and qualified contractors is highly recommended.
- Read all applicable instructions carefully and understand procedures thoroughly before beginning work.
- Wear a hardhat and eye protection, and take other appropriate safety precautions while working on or around tripods and towers.
- Do not climb tripods or towers at any time, and prohibit climbing by other persons. Take reasonable precautions to secure tripod and tower sites from trespassers.
- Use only manufacturer recommended parts, materials, and tools.

## Utility and Electrical

- You can be killed or sustain serious bodily injury if the tripod, tower, or attachments you are installing, constructing, using, or maintaining, or a tool, stake, or anchor, come in contact with overhead or underground utility lines.
- Maintain a distance of at least one-and-one-half times structure height, 6 meters (20 feet), or the distance required by applicable law, whichever is greater, between overhead utility lines and the structure (tripod, tower, attachments, or tools).
- Prior to performing site or installation work, inform all utility companies and have all underground utilities marked.
- Comply with all electrical codes. Electrical equipment and related grounding devices should be installed by a licensed and qualified electrician.
- Only use power sources approved for use in the country of installation to power Campbell Scientific devices.

## Elevated Work and Weather

- Exercise extreme caution when performing elevated work.
- Use appropriate equipment and safety practices.
- During installation and maintenance, keep tower and tripod sites clear of un-trained or non-essential personnel. Take precautions to prevent elevated tools and objects from dropping.
- Do not perform any work in inclement weather, including wind, rain, snow, lightning, etc.

## Internal Battery

- Be aware of fire, explosion, and severe-burn hazards.
- Misuse or improper installation of the internal lithium battery can cause severe injury.

- Do not recharge, disassemble, heat above 100 °C (212 °F), solder directly to the cell, incinerate, or expose contents to water. Dispose of spent batteries properly.

#### Use and disposal of batteries

- Where batteries need to be transported to the installation site, ensure they are packed to prevent the battery terminals shorting which could cause a fire or explosion. Especially in the case of lithium batteries, ensure they are packed and transported in a way that complies with local shipping regulations and the safety requirements of the carriers involved.
- When installing the batteries follow the installation instructions very carefully. This is to avoid risk of damage to the equipment caused by installing the wrong type of battery or reverse connections.
- When disposing of used batteries, it is still important to avoid the risk of shorting. Do not dispose of the batteries in a fire as there is risk of explosion and leakage of harmful chemicals into the environment. Batteries should be disposed of at registered recycling facilities.

#### Avoiding unnecessary exposure to radio transmitter radiation

- Where the equipment includes a radio transmitter, precautions should be taken to avoid unnecessary exposure to radiation from the antenna. The degree of caution required varies with the power of the transmitter, but as a rule it is best to avoid getting closer to the antenna than 20 cm (8 inches) when the antenna is active. In particular keep your head away from the antenna. For higher power radios (in excess of 1 W ERP) turn the radio off when servicing the system, unless the antenna is installed away from the station, e.g. it is mounted above the system on an arm or pole.

#### Maintenance

- Periodically (at least yearly) check for wear and damage, including corrosion, stress cracks, frayed cables, loose cable clamps, cable tightness, etc. and take necessary corrective actions.
- Periodically (at least yearly) check electrical ground connections.

WHILE EVERY ATTEMPT IS MADE TO EMBODY THE HIGHEST DEGREE OF SAFETY IN ALL CAMPBELL SCIENTIFIC PRODUCTS, THE CUSTOMER ASSUMES ALL RISK FROM ANY INJURY RESULTING FROM IMPROPER INSTALLATION, USE, OR MAINTENANCE OF TRIPODS, TOWERS, OR ATTACHMENTS TO TRIPODS AND TOWERS SUCH AS SENSORS, CROSSARMS, ENCLOSURES, ANTENNAS, ETC.

# Global Sales and Support Network

A worldwide network to help meet your needs



## Campbell Scientific Regional Offices

### Australia

**Location:** Garbutt, QLD Australia  
**Phone:** 61.7.4401.7700  
**Email:** [info@campbellsci.com.au](mailto:info@campbellsci.com.au)  
**Website:** [www.campbellsci.com.au](http://www.campbellsci.com.au)

### Brazil

**Location:** São Paulo, SP Brazil  
**Phone:** 11.3732.3399  
**Email:** [vendas@campbellsci.com.br](mailto:vendas@campbellsci.com.br)  
**Website:** [www.campbellsci.com.br](http://www.campbellsci.com.br)

### Canada

**Location:** Edmonton, AB Canada  
**Phone:** 780.454.2505  
**Email:** [dataloggers@campbellsci.ca](mailto:dataloggers@campbellsci.ca)  
**Website:** [www.campbellsci.ca](http://www.campbellsci.ca)

### China

**Location:** Beijing, P. R. China  
**Phone:** 86.10.6561.0080  
**Email:** [info@campbellsci.com.cn](mailto:info@campbellsci.com.cn)  
**Website:** [www.campbellsci.com.cn](http://www.campbellsci.com.cn)

### Costa Rica

**Location:** San Pedro, Costa Rica  
**Phone:** 506.2280.1564  
**Email:** [info@campbellsci.cc](mailto:info@campbellsci.cc)  
**Website:** [www.campbellsci.cc](http://www.campbellsci.cc)

### France

**Location:** Montrouge, France  
**Phone:** 0033.0.1.56.45.15.20  
**Email:** [info@campbellsci.fr](mailto:info@campbellsci.fr)  
**Website:** [www.campbellsci.fr](http://www.campbellsci.fr)

### Germany

**Location:** Bremen, Germany  
**Phone:** 49.0.421.460974.0  
**Email:** [info@campbellsci.de](mailto:info@campbellsci.de)  
**Website:** [www.campbellsci.de](http://www.campbellsci.de)

### India

**Location:** New Delhi, DL India  
**Phone:** 91.11.46500481.482  
**Email:** [info@campbellsci.in](mailto:info@campbellsci.in)  
**Website:** [www.campbellsci.in](http://www.campbellsci.in)

### Japan

**Location:** Kawagishi, Toda City, Japan  
**Phone:** 048.400.5001  
**Email:** [jp-info@campbellsci.com](mailto:jp-info@campbellsci.com)  
**Website:** [www.campbellsci.co.jp](http://www.campbellsci.co.jp)

### South Africa

**Location:** Stellenbosch, South Africa  
**Phone:** 27.21.8809960  
**Email:** [sales@campbellsci.co.za](mailto:sales@campbellsci.co.za)  
**Website:** [www.campbellsci.co.za](http://www.campbellsci.co.za)

### Spain

**Location:** Barcelona, Spain  
**Phone:** 34.93.2323938  
**Email:** [info@campbellsci.es](mailto:info@campbellsci.es)  
**Website:** [www.campbellsci.es](http://www.campbellsci.es)

### Thailand

**Location:** Bangkok, Thailand  
**Phone:** 66.2.719.3399  
**Email:** [info@campbellsci.asia](mailto:info@campbellsci.asia)  
**Website:** [www.campbellsci.asia](http://www.campbellsci.asia)

### UK

**Location:** Shephed, Loughborough, UK  
**Phone:** 44.0.1509.601141  
**Email:** [sales@campbellsci.co.uk](mailto:sales@campbellsci.co.uk)  
**Website:** [www.campbellsci.co.uk](http://www.campbellsci.co.uk)

### USA

**Location:** Logan, UT USA  
**Phone:** 435.227.9120  
**Email:** [info@campbellsci.com](mailto:info@campbellsci.com)  
**Website:** [www.campbellsci.com](http://www.campbellsci.com)