




SunSentry Solar Operational Meteorological Monitoring Station

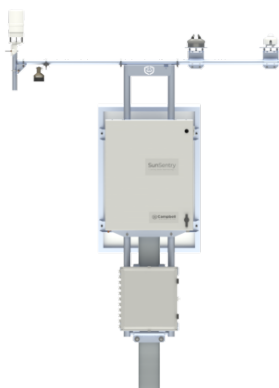

IEC 61724-1:2021 Class A Meteorological Monitoring Station

Specifically designed as a utility-scale operational met station

Overview

Campbell Scientific's SunSentry Operational Monitoring Station is purpose-built with the most up-to-date technology to be the easiest to use utility-scale operational meteorological (met) station on the market.

The SunSentry establishes a new chapter of met station design and ease of use. These stations are standardized, stocked, follow the industry requirements of IEC 61724-1:2021, and

exceed IEC 61000-4-5 Class 4 surge immunity levels. Station installation is made easy via pile-mountable hardware and an all-new web user interface (UI).

Let us make ordering, receiving, installing, and commissioning met stations as simple as possible. Contact us to see how the SunSentry can fit your upcoming projects.

Benefits and Features

- › IEC 61724-1:2021-compliant station
- › Compliance with California ISO or Alberta Electric System Operators (AESO) standards
- › Modbus or DNP 3.0 communications to SCADA
- › Quick installation and easy operation through web-based UI
- › Rugged design
- › Campbell Scientific sensor mounts for easy installation
- › Industry-leading, five-year warranty

Detailed Description

Fully IEC 61724-1 Compliant

All required and optional meteorological parameters are supported within the SunSentry embedded web UI.

Advanced Surge and Data Protection

Industry best practices were followed in station topology recommendations as well as strategic placement of surge protection devices (SPD). These improvements are for

maximum data availability while granting peace of mind for owners and developers. ISO 27001 guidance was also followed, providing an industry-first station for solar operational monitoring.

On-Time, FREE Delivery

Our project management team organizes the SunSentry delivery. Standardized and project-specific documentation packages are available. Stations are stocked and available with

short lead times or can be ordered early and delivered to your site when they are required. Each SunSentry station is packaged on its own pallet, making on-site distribution straightforward for field personnel.

Campbell Scientific has found that moving equipment out the door quickly saves us and our customers time and money. We have established relationships with all major carriers. To further shorten lead times, Campbell Scientific absorbs the shipping costs of SunSentry stations.

Note: Terms and conditions apply, including geographic availability.

Turn-Key Solution

Campbell Scientific tests and documents each complete system at our factory. The sensors are pre-labeled before shipping for easy on-site installation. Your technicians can provide us with network information for configuration prior to shipping or they can enter the information on-site using the embedded web UI.

Unparalleled Value

The SunSentry—with its UI, extensive sensor support, and robust, forward-looking hardware design—comprises met stations that are built to last each project's lifetime, evolving with changing requirements as needed. The applicable sensors collect data that allow users to glean the most value from the SunSentry.

Legendary Campbell Scientific Quality

Campbell Scientific has been providing robust hardware solutions for the most challenging meteorological settings for more than 50 years. The SunSentry leverages this expertise and now uses Campbell Scientific's proven, reliable data logger line-up for the solar energy market as a cost-effective system with a standard design.

Network Resiliency

The SunSentry is designed to isolate and protect the most valuable sensors in the most vulnerable locations. This ensures the highest data availability for sensor data to the met station. Simultaneous Modbus TCP, DNP3, and FTP data collection is available for the end user to collect data from the met stations.

Pile Mountable

Stations are designed to mount to industry-standard-driven piles without the need for drilling. SunSentry stations are designed to be installed by a single technician in a single day with common hand tools. No cement pads are required, saving material and labor costs, while still being ladder safe for quick sensor maintenance.

Standardized but Still Versatile

Built around IEC 61724-1:2021 and taking cues from many industry system requirements, the SunSentry is capable of supporting double the required parameters, making it the most scalable option on the market.

Specifications

Shipping Crate Dimensions **›** *Note: The CM400 is shipped separately.*
› 121.92 x 101.60 x 111.76 cm (48 x 40 x 44 in.)

Shipping Weight *Note: The shipping weight is based on a station design between 79.38 and 158.76 kg (175 and 350 lb).*

Weight of Shipping Crate 29.94 kg (66 lb)

Weight of Main Met 35.38 kg (78 lb)

Weight of Two Batteries 57.15 kg (126 lb)

Weight of Solar Panel with Mount 11.34 kg (25 lb)

Weight of AC Pull Box 5.90 kg (13 lb)

Weight of Pyranometer 0.45 to 0.91 kg (1 to 2 lb)

Standards Used **›** ISO 27001 documents available upon request
› IEC 61724-1:2021 and 2017 Class A compliant
› IEC 61000-4-5 Class 4 surge immunity
› ISO 9060:2018 Class A spectrally flat and fast-response pyranometers
› ISO 17025:2017 accredited calibrations where available

For comprehensive details, visit: www.campbellsci.ca/sunsentry 



Campbell Scientific (Canada) Corp. | 14532 131 Avenue NW | Edmonton AB T5L 4X4 | 780.454.2505 | www.campbellsci.ca
AUSTRALIA | BRAZIL | CANADA | CHINA | COSTA RICA | FRANCE | GERMANY | INDIA | SOUTH AFRICA | SPAIN | THAILAND | UK | USA