



OBS-5+

High Suspended Sediment Concentration Monitoring System w/ Pressure Sensor



Accurate, Rugged

For high sediment concentrations

Overview

The OBS-5+ monitors high sediment concentrations using an infrared laser and a proprietary dual photodetection system (U.S. Patent No. 5,796,481). The probe transmits sediment concentration and depth to a PC via an RS-232 or RS-485 link. Data is also stored internally.


The OBS-5+ has a Windows® GUI that enables the user to generate and store sediment calibration tables, log data, program logging/sampling schemes, and graphically display data. Using the Windows GUI, an operator can calibrate the OBS-5+ with sediments, change electronics gain to optimize resolution, create as many as 15 unique sediment lookup tables, and store those tables in flash memory for future use. Users can complete the entire calibration process without spreadsheet calculations and curve fitting.

Benefits and Features

- › Runs up to six months on three C cells
- › Monitors sediment concentrations up to 200 g L⁻¹ (specific gravity 1.30)
- › Logs instrument depth
- › Records 200,000 scans of data in flash memory
- › Supports RS-232 and RS-485 data links
- › Contained in a compact package

Applications

- › Monitor dredging and site-remediation operations
- › Determine dredge efficiency
- › Provide data for sediment transport research
- › Supports undersea mining and trenching

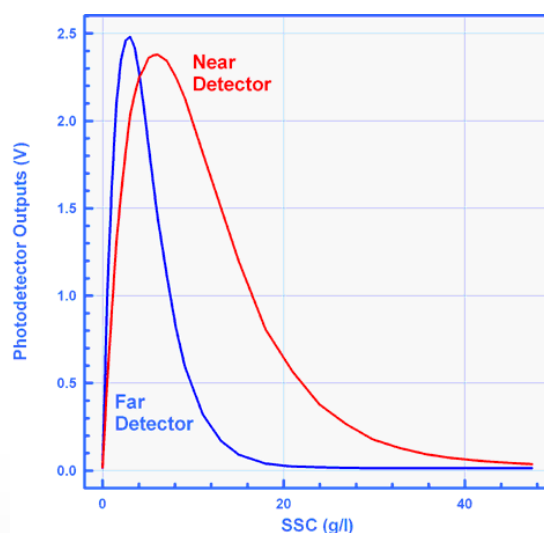

The OBS-5+ detector responses to particle concentration are shown on the chart.

questions & quotes: 435.227.9000

www.campbellsci.com/obs-5

Advantage of Multiple Detectors*

The OBS-5+ uses multiple detectors and an embedded controller, which extend the measurement range of the sensor by a factor of about ten. One limitation of our single-detector systems like the OBS-3+ is that they cannot measure suspended solids concentration (SSC) levels greater than about 10 g L⁻¹ (mud) and 100 g L⁻¹ (sand).

The OBS-5+ projects a beam of near infrared (NIR) laser light into a water sample next to two photodetectors. Suspended particles scatter light from the beam onto the detectors and a microcon-

troller determines SSC from their photocurrents. Because the detectors are unequally spaced from the laser, the particle concentrations corresponding to the peak response are also unequal and after being calibrated with sediment, an OBS-5+ can measure and uniquely resolve sediment SSC values greater than the peaks in response.

The OBS-5+ has been used extensively to monitor dredging and mining operations in the US, EU, China, Vietnam, and Indonesia.

Ordering Information

System for High Suspended Sediment Concentration

OBS-5+ High Suspended Sediment Concentration Monitoring System with Pressure Sensor (requires three C-cell batteries. Must choose a Pressure Range option (see below). The carrying case and field cable for attachment to a PC are ordered as separately.

Pressure Range Options (must choose one)

- 10** Orders a pressure transducer that measures depth up to 10 m (14 psi).
- 20** Orders a pressure transducer that measures depth up to 20 m (28 psi).
- 50** Orders a pressure transducer that measures depth up to 50 m (71 psi).
- 100** Orders a pressure transducer that measures depth up to 100 m (142 psi).
- 200** Orders a pressure transducer that measures depth up to 200 m (284 psi).

Cables for Datalogger Attachment

Campbell Scientific offers a choice of field cables that attach the OBS-5+ to a PC. The cables differ in their length.

- 21385** OBS-5+ Field Cable with 20-m (66 ft) length.
- 21100** OBS-5+ Field Cable, with 50-m (164 ft) length.

Other Accessories

- 21324** OBS-5+ Carrying Case (Holds 2)
- 4576** Alkaline C Cell Battery. Three batteries are used to power the OBS-5+. Batteries are not included.
- 21905** C Cell Battery Spacer that allows a user-supplied lithium battery to power the OBS-5+ instead of three C-cell alkaline batteries.

Specifications

- › Infrared Wavelength: 780 nm
- › Scattering Angles (clean water): 105° to 165°
- › Drift Over Time: <30 ppm per month
- › Drift Over Temperature: <200 ppm per °C
- › Maximum Sampling Rate: 25 Hz
- › Maximum Data Rate: 2 Hz
- › Data Capacity: 8 MB
- › Maximum Number of Data Lines: 200,000
- › Battery Capacity: 8 Ahr
- › Battery Life (maximum): 3,000 hr
- › External Supply Voltage: 6 to 18 Vdc
- › External Supply Current: 55 mA
- › PC Interfaces: RS-232/115 kbps, RS-485/115 kbps
- › Maximum Depth: 300 m (984 ft)

Measurement Ranges

- › Pressure: 0 to 10, 20, 50, 100, or 200 m
- › Turbidity: 0.4 to 1,000 NTUs

Concentration (depends on sediment type)

- › Mud (D50 = 20 µm): 0 to 50 g L⁻¹
- › Sand (D50 = 250 µm): 0 to 200 g L⁻¹

Accuracy

- › Pressure: 0.5% of full scale
- › Turbidity: 1.5% of full scale

Sediment Concentration

- › Mud: 2% of reading
- › Sand: 4% of reading

Physical

- › Connector: MCBH-8-FS, wet-pluggable
- › Wetted Material: 316 stainless steel, Delrin, and 20% GF polycarbonate
- › Operating Temperature Range: 0° to 40°C
- › Storage: Temperature Range: -20° to 70°C
- › Weight: 2.04 kg (4.5 lb)
- › Diameter: 6.0 cm (2.4 in.)
- › Height: 38.0 cm (15 in.)

*Reference: John Downing. 1998. *Suspended Particle Concentration Monitor*. U.S. Patent Number 5,796,481.