

Alternative Connectors

.SMA Reverse Polarity Plug(female)

P/N: C191AH-860

.SMA Reverse Thread Plug(male)

P/N: C191AT-860

Alternative Frequency Band 890-960 MHz

.SMA Plug(male)

P/N: C191AM-925


.SMA Reverse Polarity Plug(female)

P/N: C191AH-925



.SMA Reverse Thread Plug(male)

P/N: C191AT-925

E-Plane Pattern @ 925 MHz

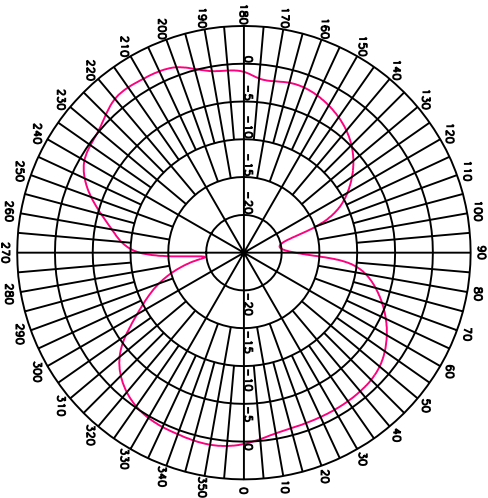

H-Plane Pattern @ 925 MHz

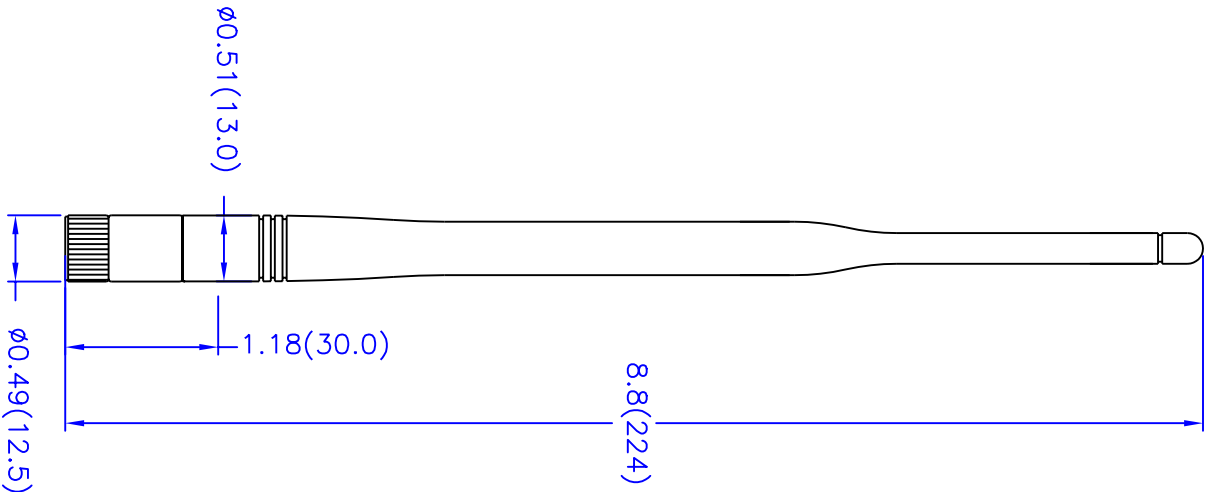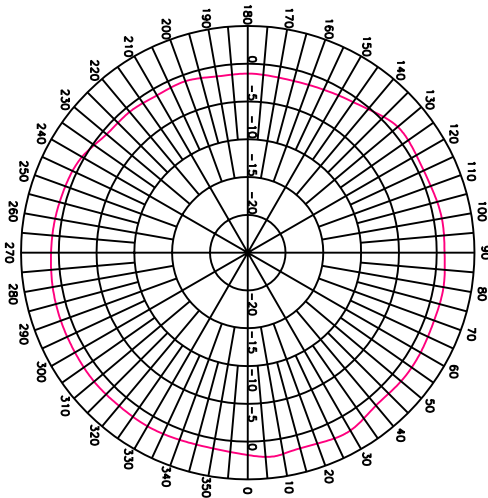

Electrical Properties:

Frequency Range: 824~896 MHz

Impedance: 50Ω nominal

VSWR: <2.0:1

Gain: 1.8 dBi

Radiation: Omni

Polarization: Vertical

Wave: Half Wave Dipole

Mechanical Properties:

Connector: SMA Plug(male)

Material:

Whip: Polyurethane(Black)

Swivel Mechanism: Polycarbonate(Black)

Connector: Brass with black chrome plating

Operation Temp.:

Storage Temp.: -30°C to +75°C

TITLE		860MHz Straight Antenna-191Model		VER
UNIT		DWG. NO. C191AM-860		
in.(mm)				
SCALE				
NONE				