




GRANITE VOLT 116

16- or 32-Channel 5V Analog Input Module

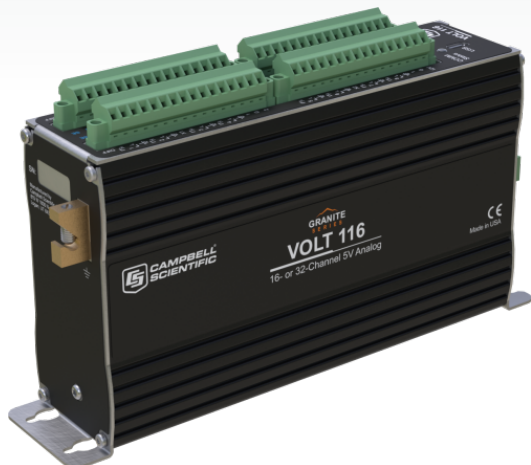

Ultimate Analog Measurement Expansion Tool

Ideal for concentrated or distributed measurements

Overview

The GRANITE™ VOLT 116 is an analog input module that allows you to easily expand your Campbell Scientific data acquisition system. The VOLT 116 has 16 differential or 32 single-ended input channels and four excitation channels. It provides two 12 V ports and two switched 12 V ports for powering your peripherals, as well as four switched 5 V ports for peripheral

control. The VOLT 116 features a 24-bit, analog-to-digital converter and a low-noise, analog front-end to provide you with superior analog measurements. This module also supports period average measurements and includes both current and voltage excitation channels.

Benefits and Features

- › 24-bit ADC and low-noise analog inputs
- › Channel count expansion via the CPI bus
- › Scales up the number of channels without adding measurement time
- › Easier to program than multiplexers
- › Programmable noise rejection
- › CANbus 2.0 A/B output available with the Extended Duty (-XD) version
- › USB 2.0 interface for PC-based operation

Specifications

Mounting	Standard 1-in. grid (DIN rail mounting available)	› $\pm(0.04\%$ of reading + offset) 0° to 40°C
Operating Temperature Range	› -40° to +70°C (standard) › -55° to +85°C (extended)	Number of Channels
Power Requirements	9.6 to 32 Vdc voltage	16 differential or 32 single-ended inputs
Accuracy	› $\pm(0.06\%$ of reading + offset) -40° to +70°C › $\pm(0.08\%$ of reading + offset) -55° to +85°C	Analog Inputs
		32 single-ended or 16 differential (with ± 5000 mV, ± 1000 mV, ± 200 mV ranges 24 bit ADC)
		Maximum Multiplexed Sample Rate
		3.0 kHz (using fast [100 μ s] input setting)



Maximum Burst Sample Rate	30 kHz
Input Range	±5000 mV, ±1000 mV, and ±200 mV
Period Averaging	Traditional period averaging on analog input channels
CPI	For data logger connection. Baud rate selectable from 50 kbps to 1 Mbps. (Allowable cable length varies depending on baud rate, number of nodes, cable quality, and noise environment, but can be as long as 700 m under proper conditions.)
USB	USB 2.0 full speed connection available for attaching to a PC. (Port is used to configure the module and download updates via our Device Configuration Utility.)
Warranty	One year against defects in materials and workmanship
Dimensions	20.3 x 12.7 x 5.1 cm (8 x 5 x 2 in.)
Weight	0.9 kg (1.95 lb)

Typical Current Drain

Sleep	<1 mA
Active 1 Hz Scan	2 mA (estimated) Assumes one single-ended measurement with the first notch frequency (f_{N1}) at 30 kHz Note: Any sensor excitation or

switched power loads will be additive to this value.

Active 20 Hz Scan	20 mA Assumes one single-ended measurement with the first notch frequency (f_{N1}) at 30 kHz
Active 1 kHz Scan	67 mA Note: Any sensor excitation or switched power loads will be additive to this value.

Voltage/Current Excitation Outputs

Voltage Excitation	±5 V (@ 50 mA)
Current Excitation	±2.5 mA (±5 V compliance voltage)
Number of Voltage/Current Excitation Outputs	4

General Purpose Outputs

Number of SW5V Outputs	4
SW5V Output Resistance	30 Ω
Number of SW12V Outputs	2
Typical Limit of SW12V Outputs	200 mA
Minimum Limit of SW12V Outputs	180 mA
Number of 12V Outputs	2
Typical Limit of 12V Outputs	200 mA
Minimum Limit of 12V Outputs	180 mA

For comprehensive details, visit: www.campbellsci.com/volt116 



Campbell Scientific, Inc. | 815 W 1800 N | Logan, UT 84321-1784 | (435) 227-9120 | www.campbellsci.com
 AUSTRALIA | BRAZIL | CANADA | CHINA | COSTA RICA | FRANCE | GERMANY | INDIA | SOUTH AFRICA | SPAIN | THAILAND | UK | USA